

May 8, 2026

POLK COUNTY, A POLITICAL SUBDIVISION OF THE STATE OF FLORIDA ADDENDUM # 2

BID 26-225, KATHLEEN ROAD AT DEESON ROAD SIGNAL PROJECT

This addendum is issued to clarify, add to, revise and/or delete items of the Contract Documents for this work. This Addendum is a part of the Contract Documents and acknowledgment of its receipt shall be noted below and on the Bid Submittal Form.

Contained within this addendum: questions and answers.

Tabatha Shirah
Senior Procurement Analyst
Procurement Division

**This Addendum sheet should be signed and submitted with your
bid submittal.**

Signature: _____

Printed Name: _____

Title: _____

Company: _____

**Bid 26-225, Kathleen Road at Deeson Road Signal Project
Addendum # 2**

Q1: Can you please provide the list of registered bidders for the Kathleen Rd & Deeson Rd project?

A1: Below is a list of registered bidders, however for the Mandatory Pre-Bid meeting attendance see Bids webpage: <https://www.polkfl.gov/bid-form/bid-26-225/>.


1. Gibbs & Register, Inc.
2. Ajax Paving Industries of Florida, LLC
3. Rogar Management
4. Cathcart Construction Company
5. ADEC Construction Inc
6. PACC Company
7. Asphalt Icons
8. Ajax Paving Industries of Florida, LLC

Q2: Can the County verify if asphalt grading For SP Is 9.5 or 12.5

A2: The asphalt grading must comply with the Florida Department of Transportation FY 2024-25 Standard Specifications for Road and Bridge Construction, specifically Section 334.

Q3: What are the signage dimensions? FDOT codes are provided but not the dimensions.

A3: All of the newly proposed sign sizes are shown in the Signing and Pavement Marking Plans below the MUTCD codes. Please refer to the MUTCD 11th edition or the Standard Highway Signs Manual for sign design.

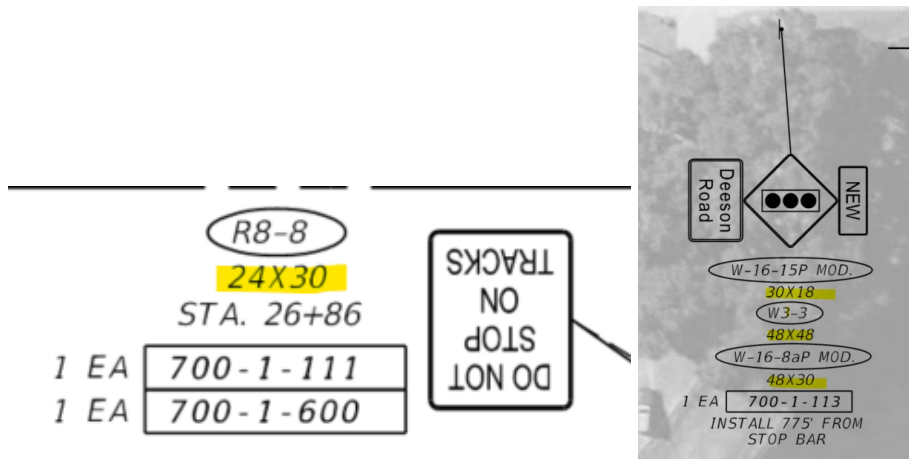

Q4: Can the County provide information on excavation (depth)?

A4: Excavation occurs along CR 35A (Kathleen Road) for right turn lane and left turn lane modifications. Please, see the cross sections to aid in identifying locations of excavation and the corresponding depth. The cross-sectional areas of excavation are shown on the right side of the page corresponding to each cross section.

**Bid 26-225, Kathleen Road at Deeson Road Signal Project
Addendum # 2**

- Q5:** Can the County provide information on embankment (depth)?
- A5:** Embankment occurs along CR 35A (Kathleen Road) for right turn lane and left turn lane modifications. Please, see the cross sections to aid in identifying locations of embankment and the corresponding depth. The cross-sectional areas of embankment are shown on the right side of the page corresponding to each cross section.
- Q6:** Can the County provide information on type of sod?
- A6:** The sod must comply with the Florida Department of Transportation FY 2024-25 Standard Specifications for Road and Bridge Construction, specifically Section 570.

Q7: Can you please provide the measurement in LF on the items highlighted below?

50	711-11-141	THERMOPLASTIC, STANDARD, WHITE, 2-4 DOTTED GUIDELINE/ 6-10 GAP EXTENSION, 6"	GM	0.020	
51	711-11-160	THERMOPLASTIC, STANDARD, WHITE, MESSAGE OR SYMBOL (RXR)	EA	2	
52	711-11-170	THERMOPLASTIC, STANDARD, WHITE, ARROW	EA	14	
53	711-11-224	THERMOPLASTIC, STANDARD, YELLOW, SOLID, 18" FOR DIAGONAL OR CHEVRON	LF	35	
54	711-14-125	THERMOPLASTIC, PREFORMED, WHITE, SOLID, 24" FOR CROSSWALK	LF	263	
55	711-14-191	THERMOPLASTIC, PREFORMED, 6" WHITE, RAILROAD DYNAMIC ENVELOPE	LF	61	
56	711-14-193	THERMOPLASTIC, PREFORMED, 12" WHITE ON ASPHALT PAVEMENT, RAILROAD DYNAMIC ENVELOPE	LF	152	
57	711-16-101	THERMOPLASTIC, STANDARD-OTHER SURFACES, WHITE, SOLID, 6"	GM	0.493	
58	711-16-131	THERMOPLASTIC, STANDARD-OTHER SURFACES, WHITE, SKIP, 6",10-30 SKIP OR 3-9 LANE DROP	GM	0.002	
59	711-16-201	THERMOPLASTIC, STANDARD-OTHER SURFACES, YELLOW, SOLID, 6"	GM	0.502	

A7: Per the FDOT Basis of Estimates (BOE) manual, these pay items are measured in Gross Mile. Gross Mile can be converted to LF by multiplying the number of gross miles by 5,280.